
LE - LEOPARD

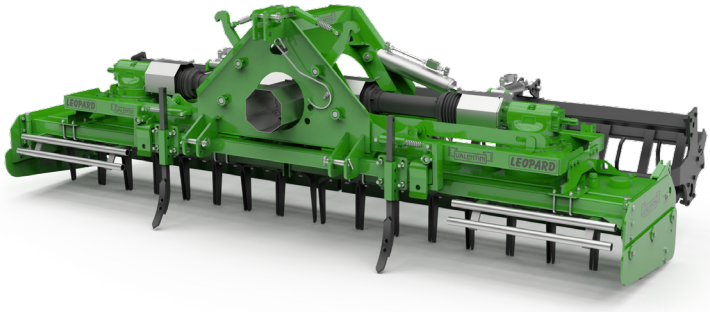

SKF Equipped

MODEL	3200	3600	4000	4600
Power required HP	110-180	120-180	130-180	150-180
Power required kW	81-132	88-132	96-132	110-132
Working width mm	3276	3716	4156	4596
Total footprint mm	3323	3763	4203	4643
Tools n°	28	32	36	40
Rotor rpm	345	345	345	345
Weight* w/ CAGE ROLLER Ø410 kg	1400	1570	1740	1900

*Approximate

EQUIPMENT	STANDARD
3 points universal hitch (Category 2)	●
Single speed unit, 1000 rpm	●
Fixed central PTO shaft (tractor side fork 1” 3/8 Z6)	●
Side PTO shaft with shear bolt	●
Rotor spacing 22 cm, with 90×12 mm blades	●
Circular tool carrier shafts – case-hardened – Heavy Duty version	●
Central and side gears – case-hardened – Heavy Duty version	●
Oil-bath transmission housing	●
Automatic hydraulic device with safety transport hooks	●
Hydraulic opening and closing of the units with 2 cylinders and controlled locking valves	●
Height-adjustable side containment guards	●
Pin-adjustable levelling bar for height and distance from the blades	●
Pin-adjustable rear rollers	●
Automatic rear roller alignment device by Valentini – on request	

- For tough or stony soils, it is recommended to fit the harrow with stone protection kit

» Accessories on p. 42 » Rollers on p. 58

Images for illustrative purposes only. The product may vary due to design modifications.