
MT - MAMMUT

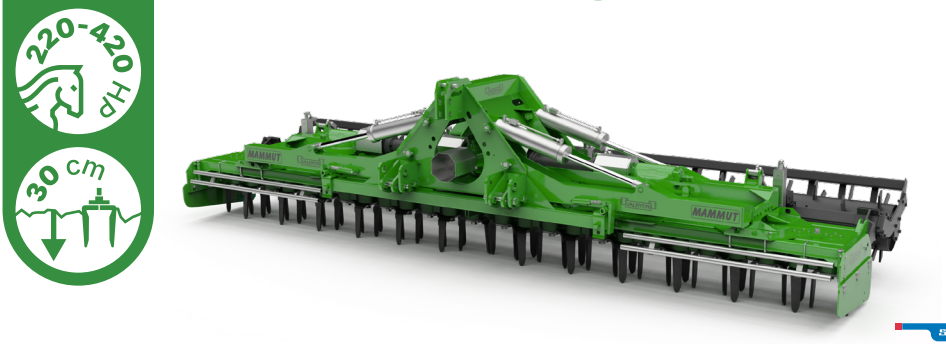

SKF Equipped

MODEL	5000	6000	7000	8000	9000
Power required HP	220-420	250-420	300-420	350-420	380-420
Power required kW	162-309	183-309	221-309	257-309	279-309
Working width mm	5044	5924	6804	7684	8564
Total footprint mm	5091	5971	6851	7731	8611
Tools n°	44	52	60	68	76
Rotor rpm	361	361	361	361	361
Weight* w/ CAGE ROLLER Ø510 kg	3610	4090	4590	5050	5550

*Approximate

EQUIPMENT	STANDARD
3 points universal hitch (3N e 4L N categoria)	●
Front oscillating bar hitch	●
Single speed unit, 1000 rpm	●
Fixed central PTO shaft (tractor side fork 1” 3/4 Z20)	●
Mod. 5000/6000: Side PTO shaft with shear bolt	●
Mod. 7000/8000/9000: Side PTO shaft with disc clutch	●
Rotor spacing 22 cm, with 100×15 mm blades	●
Quick blade removal	●
Circular tool carrier shafts – Heavy Duty version	●
Central and side gears – case-hardened – Heavy Duty version	●
Oil-bath transmission housing	●
Hydraulic opening and closing of the units with 4 cylinders and controlled locking valves	●
Height-adjustable side containment guards	●
Mechanical jack adjustment of the levelling bar for height and pin adjustment for distance from the blades	●
Hydraulically adjustable rear rollers with 4 cylinders and locking valves	●
Automatic rear roller alignment device by Valentini – on request	

- For tough or stony soils, it is recommended to fit the harrow with stone protection kit

» Accessories on p. 42 » Rollers on p. 58

Images for illustrative purposes only. The product may vary due to design modifications.