
MD - MAXI DIABLO

160-340 HP

30 cm

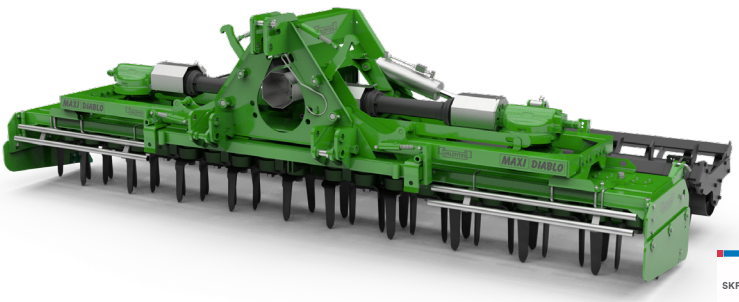

SKF Equipped

MODEL	4000	4600	5000	6000
Power required HP	160-280	180-280	200-300	230-340
Power required kW	118-206	132-206	147-221	169-250
Working width mm	4164	4604	5044	5924
Total footprint mm	4211	4651	5091	5971
Tools n°	36	40	44	52
Rotor rpm	361	361	361	361
Weight* w/ CAGE ROLLER Ø510 kg	2440	2800	3000	3300

*Approximate

EQUIPMENT	STANDARD
3 points universal hitch (Category 3N)	●
Front oscillating bar hitch	●
Single speed unit, 1000 rpm	●
Fixed central PTO shaft (tractor side fork 1” 3/8 Z6 fino mod. 5000, 1” 3/4 Z20 mod. 6000)	●
Side PTO shaft with shear bolt	●
Rotor spacing 22 cm, with 100×12 mm blades	●
Quick blade removal	●
Circular tool carrier shafts – Heavy Duty version	●
Mod. 4000/4600/5000: Automatic hydraulic device with safety transport hooks	●
Mod. 4000/4600/5000: Hydraulic opening and closing of the units with 2 cylinders and controlled locking valves	●
Mod. 6000: Hydraulic opening and closing of the units with 4 cylinders and controlled locking valves	●
Height-adjustable side containment guards	●
Pin-adjustable levelling bar for height and distance from the blades	●
Pin-adjustable rear rollers	●
Automatic rear roller alignment device by Valentini – on request	

• For tough or stony soils, it is recommended to fit the harrow with stone protection kit » Accessories on p. 42 » Rollers on p. 58

Images for illustrative purposes only. The product may vary due to design modifications.