
TG - TIGER

30-100 Hp

28 cm

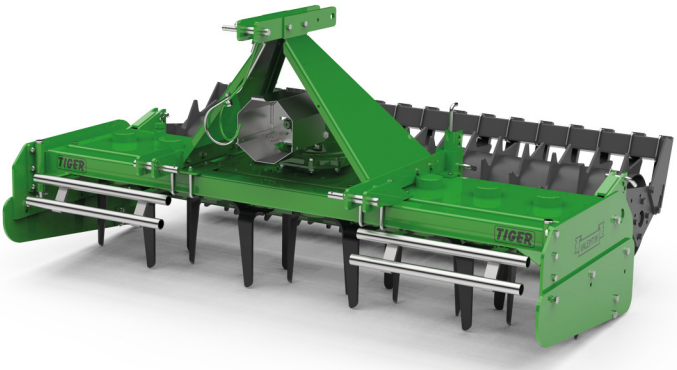

SKF Equipped

MODEL	1400	1600	1800	2000	2250	2500
Power required HP	30-100	40-100	50-100	60-100	70-100	80-100
Power required kW	22-74	29-74	37-74	44-74	51-74	59-74
Working width mm	1400	1620	1840	2060	2280	2500
Total footprint mm	1467	1687	1907	2127	2347	2550
Tools n°	12	14	16	18	20	22
Rotor rpm	360	360	360	360	360	360
Weight* W/ CAGE ROLLER Ø410 kg	450	510	570	640	700	760

*Approximate

EQUIPMENT	STANDARD
3 points universal hitch (Category 2)	●
Single speed unit, 540 rpm	●
Central PTO shaft with shear bolt (tractor side fork 1” 3/8 Z6)	●
Rotor spacing 22 cm, with 90×12 mm blades	●
Circular tool carrier shafts – case-hardened – Heavy Duty version	●
Central and side gears – case-hardened – Heavy Duty version	●
Oil-bath transmission housing	●
Due coltelli per Rotor	●
Height-adjustable side containment guards	●
Regolazione a perni della barra livellatrice in altezza	●
Pin-adjustable rear rollers	●

Images for illustrative purposes only. The product may vary due to design modifications.

• For tough or stony soils, it is recommended to fit the harrow with stone protection kit

» Accessories on p. 42 » Rollers on p. 58