


SIRIO

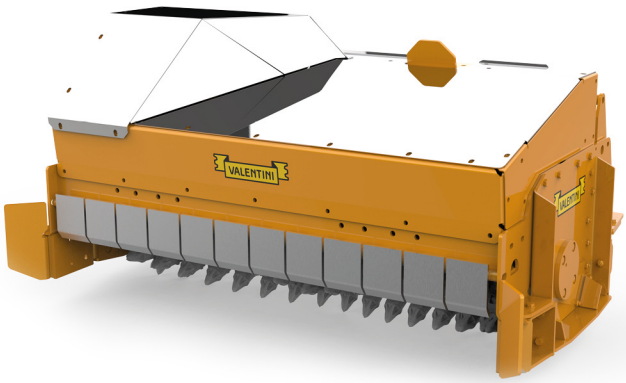

SKF Equipped

HARDOX IN MY BODY

MODEL	1000	1300	1500
Power required HP	90-120	90-120	90-120
Power required kW	66-88	66-88	66-88
Working width mm	1080	1330	1580
Total width mm	1300	1550	1800
Flow rate l/min	110-170	110-170	110-170
Operating pressure bar	220-350	220-350	220-350
Weight* kg	880	1070	1200

*Approximate

EQUIPMENT	STANDARD
180 cc piston hydraulic motor	●
Skid-compatible attachments	●
Rotor with Ø 25 high-strength, wear-resistant steel bits	●
Anti-cavitation safety valve	●
Protective housing in Hardox® steel	●
Gear transmission by Valentini	●
Working pressure gauge	●
Front protective flaps	●
Flat counter-blades welded in Hardox®	●
Hardox® adjustable grid with hydraulic cylinders	●
Front shares	●

» Accessories on p. 30

Images for illustrative purposes only. The product may vary due to design modifications.