
70-110 Hp

7-15 cm

15 cm

FRUTTI

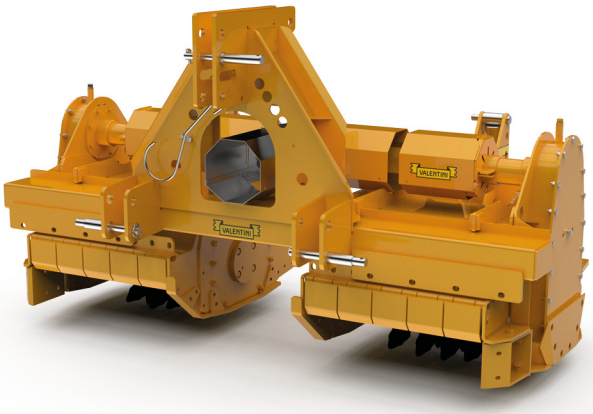

STONE CRUSHER

SKF Equipped

HARDOX IN MY BODY

MODEL	450X450	600X600
Power required HP	70-110	90-110
Power required kW	51-81	66-81
Working width per body mm	450	600
Folded width mm	2058	2058
Total width mm	2500	2500
Bits* n°	80	100
Rotor rpm	323	323
Weight** kg	1400	1550

*Net of additional bits for rotor balancing **Approximate

EQUIPMENT	STANDARD
3 points universal hitch (Category 2)	●
Single speed unit, 540 rpm	●
Size 503 reinforced rotor with Ø 25 high-strength, wear-resistant steel bits	●
Protective rings for the transmission support and the idler-side support	●
Central PTO shaft with shear bolt (tractor side fork 1” 3/8 Z6)	●
Frame with two independent bodies	●
Mechanical opening and closing of the two bodies	●
Oil-bath gear transmission on both bodies	●
Oil-bath idler-side supports on both bodies	●
Bearing support with special seals, Labyrinth Bearing Protection by Valentini	●
Rear containment plates and adjustable crushed product screening grids with mechanical jack	●
Protective shroud casing and sledge on outer side	●
Counter protective guard in high-strength, wear-resistant steel	●

TRACTOR EQUIPMENT REQUIRED

- Variable speed gearbox or creeper gearbox
- Hydraulic valves: 2–4
- Front ballast if necessary

» Accessories on p. 30

Images for illustrative purposes only. The product may vary due to design modifications.