


FR - RAMBO

STONE CRUSHER

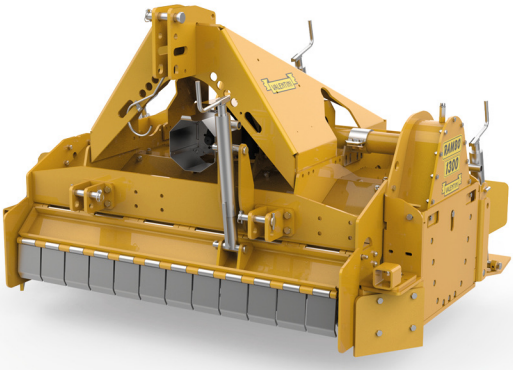

SKF Equipped

HARDOX IN MY BODY

MODEL	1000	1300	1500
Power required HP	110-150	120-150	130-150
Power required kW	81-110	89-110	96-110
Working width mm	1075	1325	1575
Total width mm	1425	1675	1925
Bits* n°	88	112	133
Rotor rpm	236	236	236
Weight** kg	1780	1900	2100

*Net of additional bits for rotor balancing **Approximate

EQUIPMENT	STANDARD
3 points universal hitch (Category 2 and 3)	●
Single speed unit, 540 rpm	●
Ø 636 reinforced rotor with Ø 25 high-strength, wear-resistant steel bits	●
Protective rings for the transmission support and the idler-side support	●
Central PTO shaft with shear bolt (tractor side fork 1” 3/8 Z6)	●
Single side gear transmission in oil bath by Valentini 4G	●
Oil-bath idler-side support	●
Bearing support with special seals, Labyrinth Bearing Protection by Valentini	●
Rear containment plates and adjustable crushed product screening grids with mechanical jack	●
Adjustable front conveyors with mechanical jacks	●
Adjustable skids with mechanical jacks	●
Protective shroud casing and sledge on outer side	●
Counter protective guard in high-strength, wear-resistant steel	●

TRACTOR EQUIPMENT REQUIRED
- Variable speed gearbox
- Hydraulic valves: 2–4
- Front ballast if necessary

» Accessories on p. 30

Images for illustrative purposes only. The product may vary due to design modifications.