
70-110 HP

7-15 cm

15 cm

SC - SCORPION

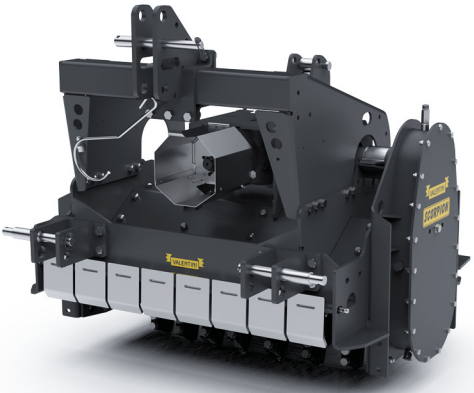

SKF Equipped

HARDOX IN MY BODY

MODEL	1000	1300	1500
Power required HP	70-110	80-110	90-110
Power required kW	51-81	59-81	66-81
Working width mm	1075	1325	1575
Total width mm	1295	1545	1795
Teeth* n°	36	46	56
Rotor rpm	323	323	323
Weight** kg	940	1050	1250

*Net of additional bits for rotor balancing **Approximate

EQUIPMENT	STANDARD
3 points universal hitch (Category 2)	●
Single speed unit, 540 rpm	●
Ø 500 reinforced rotor with size 40 cutting teeth in high-strength, wear-resistant steel	●
Protective rings for the transmission support and the idler-side support	●
Central PTO shaft with shear bolt (tractor side fork 1" 3/8 Z6)	●
Single side gear transmission in oil bath	●
Oil-bath idler-side support	●
Bearing support with special seals, Labyrinth Bearing Protection by Valentini	●
Rear containment plates and adjustable crushed product screening grids with mechanical jack	●
Protective shroud casing and sledge on outer side	●
Counter protective guard in high-strength, wear-resistant steel	●

TRACTOR EQUIPMENT REQUIRED
- Variable speed gearbox or creeper gearbox
- Hydraulic valves: 2–4
- Front ballast if necessary

» Accessories on p. 44

Images for illustrative purposes only. The product may vary due to design modifications.