


SC - SCORPION

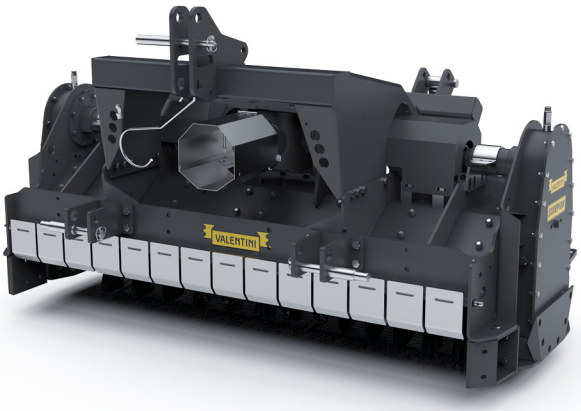

SKF Equipped

HARDOX IN MY BODY

MODEL	1800	2000	2300	2500	2800
Power required HP	100-170	120-170	130-170	150-220	170-220
Power required kW	74-125	88-125	103-125	110-162	125-162
Working width mm	1825	2075	2325	2575	2825
Total width mm	2075	2325	2575	2825	3075
Teeth* n°	66	76	86	96	106
Rotor rpm	328	328	328	328	328
Weight** kg	1550	1700	1860	2020	2180

*Net of additional bits for rotor balancing **Approximate

EQUIPMENT	STANDARD
3 points universal hitch (Category 2)	●
Single speed unit, 1000 rpm	●
Ø 500 reinforced rotor with size 40 cutting teeth in high-strength, wear-resistant steel	●
Protective rings for the transmission support	●
Central PTO shaft with shear bolt (tractor side fork 1” 3/8 Z6)	●
Double side gear transmission in oil bath	●
Bearing support with special seals, Labyrinth Bearing Protection by Valentini	●
Rear containment plates and screening grids for crushed material, adjustable with mechanical jacks	●
Protective shroud casing and sledge on outer side	●
Counter protective guard in high-strength, wear-resistant steel	●
Friction timing system by Valentini	●

TRACTOR EQUIPMENT REQUIRED
- Variable speed gearbox
- Hydraulic valves: 2–4
- Front ballast if necessary

» Accessories on p. 44

Images for illustrative purposes only. The product may vary due to design modifications.