


AP - APACHE-S2

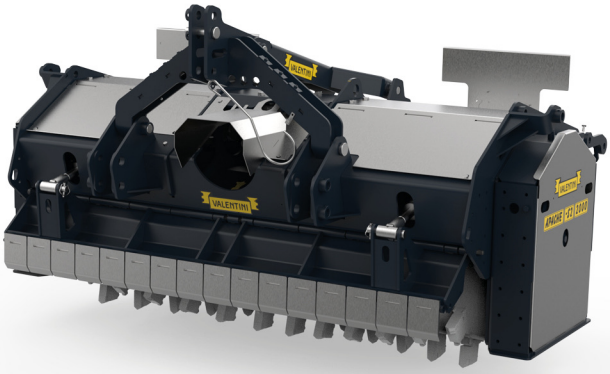

SKF Equipped

HARDOX IN MY BODY

MODEL	1800	2000	2300	2500	2800	3000
Power required HP	140-280	150-280	170-280	190-280	210-280	230-280
Power required kW	103-206	118-206	125-206	140-206	154-206	169-206
Working width mm	1825	2075	2325	2575	2825	3075
Total width mm	2210	2460	2710	2960	3210	3460
Teeth* n°	66	76	86	96	106	116
Rotor rpm	324	324	324	324	324	324
Weight** kg	2600	2850	3050	3250	3450	3650

*Net of additional bits for rotor balancing **Approximate

EQUIPMENT	STANDARD
3 points universal hitch (Category 2 and 3)	●
Single speed unit, 1000 rpm	●
Ø 635 reinforced rotor with size 40 cutting teeth in high-strength, wear-resistant steel	●
Protective rings for the transmission support	●
Central PTO shaft with shear bolt (tractor side fork 1” 3/8 Z6 up to mod. 2300, 1" 3/4 Z20 from mod. 2500)	●
Double side gear transmission in oil bath by Valentini 4G	●
Bearing support with special seals, Labyrinth Bearing Protection by Valentini	●
Rear containment plates for screening crushed material, hydraulically adjustable	●
Adjustable front conveyors with hydraulic jacks	●
Working depth skids adjustable with hydraulic jacks	●
Protective shroud casing and sledge on outer side	●
Counter protective guard in high-strength, wear-resistant steel	●
Friction timing system by Valentini	●

TRACTOR EQUIPMENT REQUIRED
- Variable speed gearbox
- Hydraulic valves: 2–4
- Front ballast if necessary

» Accessories on p. 44

Images for illustrative purposes only. The product may vary due to design modifications.