
220-430 HP

27-50 cm

50 cm

CB - CANNIBAL

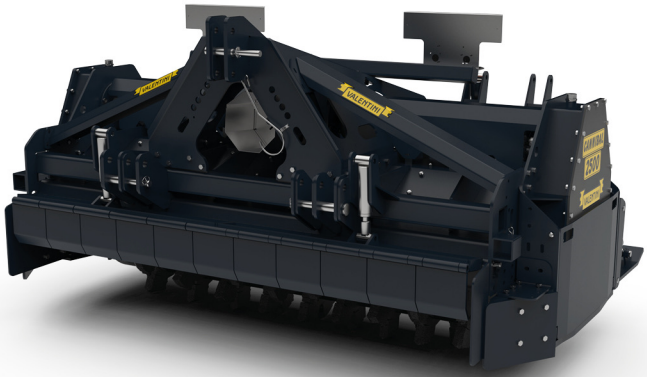

SKF Equipped

HARDOX IN MY BODY

MODEL	1800	2000	2300	2500	2800	3000	3300	3500
Power required HP	220-400	260-400	280-400	300-400	320-400	350-400	380-400	400-430
Power required kW	164-298	191-298	206-298	221-298	235-298	257-298	279-298	298-320
Working width mm	1745	1995	2245	2495	2745	2995	3245	3495
Total width mm	2210	2460	2710	2960	3210	3460	3710	3960
Teeth* n°	66	76	86	96	106	116	126	136
Rotor rpm	323	323	323	323	323	323	323	323
Weight** kg	4800	5300	5800	6400	6900	7400	7600	8150

*Net of additional bits for rotor balancing **Approximate

EQUIPMENT	STANDARD
3 points universal hitch (Category 3 up to mod. 2500, category 3 and 4 from mod. 2800)	●
Single speed unit, 1000 rpm	●
Ø 950 reinforced rotor with size 50 cutting teeth in high-strength, wear-resistant steel	●
Protective rings for the transmission support	●
Central PTO shaft with shear bolt (tractor side fork 1” 3/4 Z20)	●
Double side gear transmission in oil bath by Valentini-4G	●
Bearing support with special seals, Labyrinth Bearing Protection by Valentini	●
Rear containment plates for screening crushed material, hydraulically adjustable	●
Front deflectors adjustable by hydraulic jack	●
Working depth skids adjustable by hydraulic jack	●
Protective shrouds for the side casings	●
Counter protective guard in high-strength, wear-resistant steel	●
Friction timing system by Valentini	●

TRACTOR EQUIPMENT REQUIRED
- Variable speed gearbox
- Hydraulic valves: 2–6
- Front ballast if necessary

» Accessories on p. 44

Images for illustrative purposes only. The product may vary due to design modifications.