
120-190 HP

22-40 cm

Ø 40 cm

DE - DEMONIO

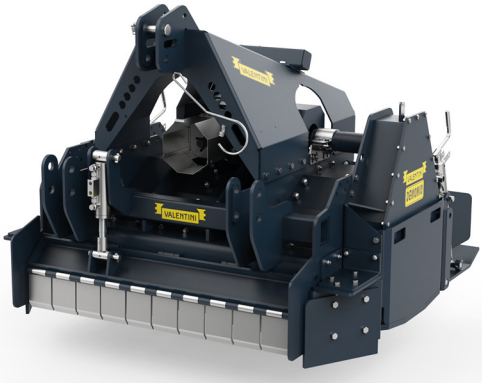

SKF Equipped

HARDOX IN MY BODY

MODEL	1000	1300	1500
Power required HP	120-190	130-190	140-190
Power required kW	89-140	96-140	103-140
Working width mm	1075	1325	1575
Total width mm	1515	1765	2015
Teeth* n°	36	46	56
Rotor rpm	305	305	305
Weight** kg	2200	2500	2750

*Net of additional bits for rotor balancing **Approximate

EQUIPMENT	STANDARD
3 points universal hitch (Category 3)	●
Single speed unit, 1000 rpm	●
Ø 800 reinforced rotor with size 50 cutting teeth in high-strength, wear-resistant steel	●
Protective rings for the transmission support and the idler-side support	●
Central PTO shaft with shear bolt (tractor side fork 1” 3/8 Z6)	●
Single side gear transmission in oil bath by Valentini 4G	●
Oil-bath idler-side support	●
Bearing support with special seals, Labyrinth Bearing Protection by Valentini	●
Hydraulically adjustable rear containment plates	●
Adjustable front conveyors with mechanical jacks	●
Working depth skids adjustable by mechanical jack	●
Protective shroud casing and sledge on outer side	●
Counter protective guard in high-strength, wear-resistant steel	●
Friction timing system by Valentini	●

TRACTOR EQUIPMENT REQUIRED
- Variable speed gearbox
- Hydraulic valves: 2–6
- Front ballast if necessary

» Accessories on p. 44

Images for illustrative purposes only. The product may vary due to design modifications.