
DE - DEMONIO-S2

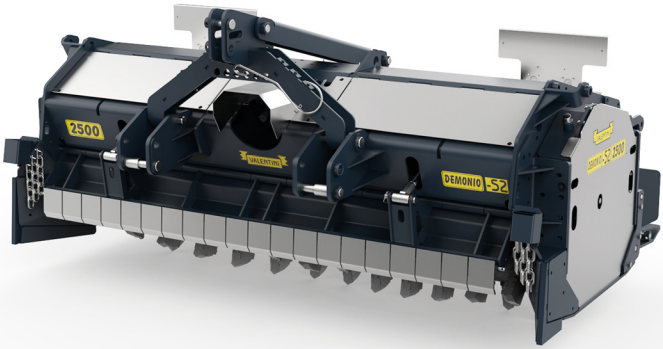

180-380 HP

22-40 cm

Ø 40 cm

SKF Equipped

HARDOX IN MY BODY

MODEL	1800	2000	2300	2500	2800	3000	3300
Power required HP	180-280	200-280	220-380	230-380	250-380	270-380	290-380
Power required kW	132-205	147-205	161-279	169-279	183-279	198-279	213-279
Working width mm	1865	2065	2365	2565	2865	3065	3365
Total width mm	2285	2485	2785	2985	3285	3485	3785
Teeth* n°	51	56	65	71	81	84	95
Rotor rpm	330	330	330	330	330	330	330
Weight** kg	4280	4580	4880	5280	5580	5880	6180

*Net of additional bits for rotor balancing **Approximate

EQUIPMENT	STANDARD
3 points universal hitch (Category 3N, 3 and 4L N)	●
Single speed unit, 1000 rpm	●
Ø 735 reinforced rotor with size 50 cutting teeth in high-strength, wear-resistant steel	●
Protective rings for the transmission support	●
Central PTO shaft with shear bolt (tractor side fork 1" 3/4 Z20)	●
Double side gear transmission in oil bath by Valentini 4G	●
Bearing support with special seals, Labyrinth Bearing Protection by Valentini	●
Rear containment plates and adjustable screening grids for crushed material with hydraulic jacks	●
Adjustable front conveyors with hydraulic jacks	●
Working depth skids adjustable by mechanical jack	●
Counter protective guard in high-strength, wear-resistant steel	●
Friction timing system by Valentini	●

TRACTOR EQUIPMENT REQUIRED
- Variable speed gearbox
- Hydraulic valves: 2–6
- Front ballast if necessary

» Accessories on p. 44

Images for illustrative purposes only. The product may vary due to design modifications.