
IR - IRIS

45-100 Hp

25 cm

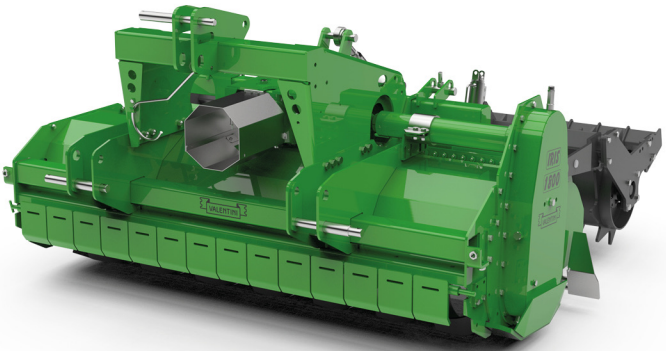

SKF Equipped

MODEL	1300	1500	1800	2000	2300	2500
Power required HP	45-80	50-100	55-100	60-100	65-100	70-100
Power required kW	33-59	37-74	40-74	44-74	48-74	51-74
Working width mm	1350	1600	1850	2100	2350	2600
Total footprint mm	1550	1800	2050	2300	2550	2800
Hoes n°	30	36	42	48	54	60
Hoes rotor/blades-points rpm	239/323	239/323	239/323	239/323	239/323	239/323
Weight* w/ CAGE ROLLER Ø475 kg	840	990	1080	1150	1250	1360

*Approximate

EQUIPMENT	STANDARD
3 points universal hitch (Category 2)	●
Single speed unit, 540 rpm	●
Ø 500 reinforced rotor with high-strength, wear-resistant steel flanges	●
Helical blades: 6 per flange, size 80×8 mm	●
Oil-bath non-drive side support	●
External scraper blades	●
Central PTO shaft with shear bolt (tractor side fork 1" 3/8 Z6)	●
Single lateral transmission with gears in oil bath	●
Ball bearing	●
Bearing support with special seals, Labyrinth Bearing Protection by Valentini	●
Mod. 2500: Top link brackets	●
Adjustable rear sheets with Fast Regulation shock absorbers	●
Spring rear grid	●
ROLLER V. 1 mechanical jack for depth adjustment	●
ROLLER V. Roller differs from the machine outline	●
ROLLER V. Protective shroud casing and sledge on outer side	●

- For tough or stony soils, it is recommended to fit the rotary tiller with counter flanges
- For better soil refinement, it is recommended to install ridging shares or side discs

» Accessories on p. 56
» Rollers on p. 58

Images for illustrative purposes only. The product may vary due to design modifications.