
VE - VENERE

70-120 HP

28 cm

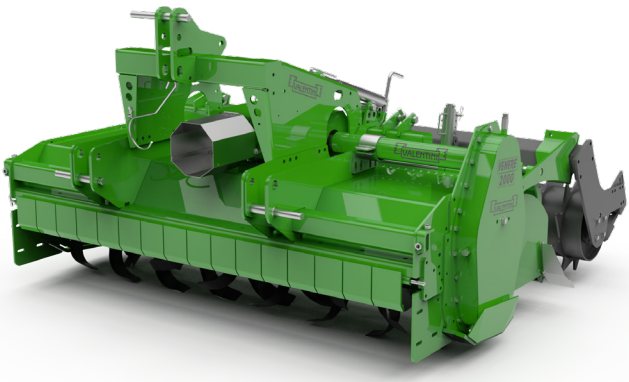

SKF Equipped

MODEL	2000	2300	2500	2800
Power required HP	70-120	80-120	90-120	100-120
Power required kW	53-90	60-90	67-90	74-90
Working width mm	2100	2350	2600	2850
Total footprint mm	2300	2550	2800	3050
Hoes n°	48	54	60	66
Hoes rotor/blades-points rpm	239 / 323	239 / 323	239 / 323	239 / 323
Weight* W/ CAGE ROLLER Ø475 kg	1340	1470	1600	1700

*Approximate

	EQUIPMENT	STANDARD
	3 points universal hitch (Category 2 and 3N)	●
	Single speed unit, 540 rpm	●
	Ø 540 reinforced rotor with high-strength, wear-resistant steel flanges	●
	Helical blades: 6 per flange, size 80×8 mm	●
	Oil-bath non-drive side support	●
	External scraper blades	●
	Central PTO shaft with shear bolt (tractor side fork 1” 3/8 Z6)	●
	Single lateral transmission with gears in oil bath	●
	Ball bearing	●
	Bearing support with special seals, Labyrinth Bearing Protection by Valentini	●
	Mod. 2500/2800: Top link brackets	●
	Adjustable rear sheets with Fast Regulation shock absorbers	●
	Spring rear grid	●
ROLLER V.	Mod. 2000/2300/2500: 1 mechanical jack for depth adjustment	●
ROLLER V.	Mod. 2800: 2 mechanical jacks for depth adjustment	
ROLLER V.	Roller differs from the machine outline	●
ROLLER V.	Protective shroud casing and sledge on outer side	●

- For tough or stony soils, it is recommended to fit the rotary tiller with counter flanges
- For better soil refinement, it is recommended to install ridging shares or side discs

» Accessories on p. 56
» Rollers on p. 58

Images for illustrative purposes only. The product may vary due to design modifications.