
VP - VIPER

110-180 HP

25 cm

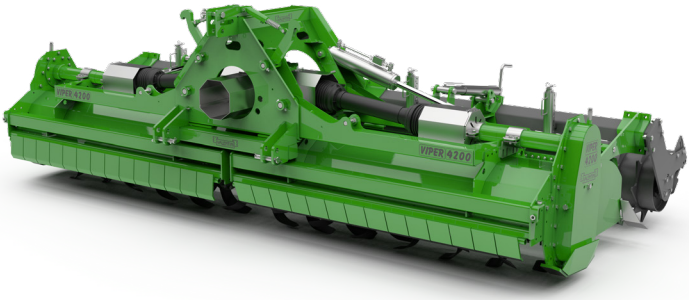

SKF Equipped

MODEL	3200	3700	4200
Power required HP	110-180	120-180	130-180
Power required kW	81-132	88-132	96-132
Working width mm	3250	3750	4250
Total footprint mm	3500	4000	4500
Hoes n°	72	84	96
Hoes rotor/blades-points rpm	229 / 289	289	289
Weight* W/ CAGE ROLLER Ø475 kg	1900	2160	2400

*Approximate

EQUIPMENT		STANDARD
3 points universal hitch (Category 2)		●
Central anchor		●
Single speed unit, 1000 rpm		●
Ø 500 reinforced rotor with high-strength, wear-resistant steel flanges		●
Helical blades: 6 per flange, size 80×8 mm		●
Oil-bath non-drive side support		●
External scraper blades		●
Fixed central PTO shaft (tractor side fork 1” 3/8 Z6)		●
Side PTO shaft with shear bolt		●
Side gear transmission with gears in oil bath		●
Ball bearing		●
Bearing support with special seals, Labyrinth Bearing Protection by Valentini		●
Hydraulic opening and closing of the units with 2 cylinders and controlled locking valves		●
Automatic hydraulic device with safety transport hooks		●
Adjustable rear sheets with Fast Regulation shock absorbers		●
Spring rear grid		●
ROLLER V.	2 mechanical jacks for depth adjustment (1 per roller)	●
	Roller parallel to the transmission	●
	Automatic rear roller alignment device by Valentini – on request	
	Casing protection cap	●

- For tough or stony soils, it is recommended to fit the rotary tiller with counter flanges
- For better soil refinement, it is recommended to install ridging shares or side discs

» Accessories on p. 56
» Rollers on p. 58

Images for illustrative purposes only. The product may vary due to design modifications.