
AP - APOLLO

110-190 HP

28 cm

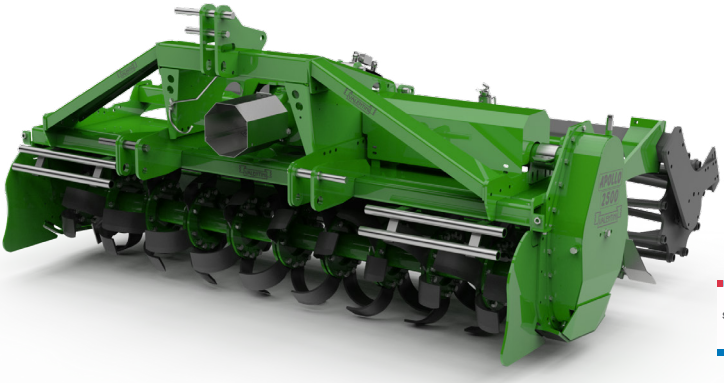

SKF Equipped

MODEL	2500	2800	3000	3300
Power required HP	110-190	120-190	140-190	150-190
Power required kW	81-142	88-142	102-142	110-142
Working width mm	2600	2850	3100	3350
Total footprint mm	2800	3050	3300	3550
Hoes n°	60	66	72	78
Hoes rotor/blades-points rpm	259 / 324	259 / 324	259 / 324	259 / 324
Weight* w/ CAGE ROLLER Ø510 kg	1480	1620	1770	1890

*Approximate

EQUIPMENT		STANDARD
	3 points universal hitch (Category 2 and 3N)	●
	Single speed unit, 1000 rpm	●
	Ø 540 reinforced rotor with high-strength, wear-resistant steel flanges	●
	Helical blades: 6 per flange, size 90×10 mm	●
	Oil-bath non-drive side support	●
	External scraper blades	●
	Central PTO shaft with shear bolt (tractor side fork 1” 3/8 Z6)	●
	Single lateral transmission with gears in oil bath by Valentini 4G	●
	Spherical roller bearing	●
	Bearing support with special seals, Labyrinth Bearing Protection by Valentini	●
	Top link brackets	●
	Adjustable rear sheets with Fast Regulation shock absorbers	●
ROLLER V.	Mod. 2500: 1 mechanical jack for depth adjustment	●
ROLLER V.	Mod. 2800/3000/3300: 2 mechanical jacks for depth adjustment	●
ROLLER V.	Roller differs from the machine outline	●
ROLLER V.	Protective shroud casing and sledge on outer side	●

- For tough or stony soils, it is recommended to fit the rotary tiller with counter flanges

» Equipment on p. 21 » Rollers on p. 58

Images for illustrative purposes only. The product may vary due to design modifications.