
AR - ARES

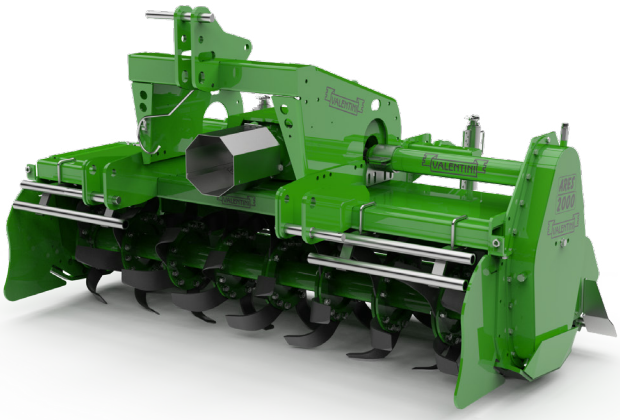

SKF Equipped

MODEL	2000	2300	2500
Power required HP	70-120	80-120	90-120
Power required kW	53-90	60-90	67-90
Working width mm	2100	2350	2600
Total footprint mm	2300	2550	2800
Hoes n°	48	54	60
Hoes rotor/blades-points rpm	239 / 323	239 / 323	239 / 323
Weight* W/ CAGE ROLLER Ø510 kg	1100	1200	1300

*Approximate

EQUIPMENT	STANDARD
3 points universal hitch (Category 2)	●
Single speed unit, 540 rpm	●
Ø 540 reinforced rotor with high-strength, wear-resistant steel flanges	●
Helical blades: 6 per flange, size 80×8 mm	●
Oil-bath non-drive side support	●
External scraper blades	●
Central PTO shaft with shear bolt (tractor side fork 1” 3/8 Z6)	●
Single lateral transmission with gears in oil bath	●
Ball bearing	●
Bearing support with special seals, Labyrinth Bearing Protection by Valentini	●
Top link brackets for model 2500	●
Adjustable rear sheets with Fast Regulation shock absorbers	●
ROLLER V. 1 mechanical jack for depth adjustment	●
Roller differs from the machine outline	●
Protective shroud casing and sledge on outer side	●

- For tough or stony soils, it is recommended to fit the rotary tiller with counter flanges

» Equipment on p. 21 » Rollers on p. 58

Images for illustrative purposes only. The product may vary due to design modifications.