
RA-L 400-600

70-120 HP

40-60 cm

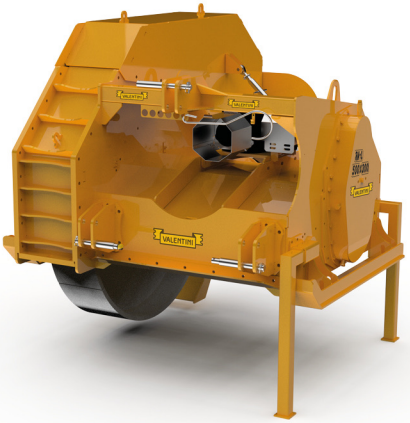

SKF Equipped

HARDOX IN MY BODY

MODEL	400×100	400×150	500×150	500×300	600×200
Power required HP	70-90	80-95	90-110	100-120	100-120
Power required kW	52-66	59-70	66-82	74-89	74-89
Working width mm	100	150	150	300	200
Total width mm	1500	1500	1700	1900	2000
Working depth** cm	40	40	50	50	60
Bits Ø mm	22	22	22	22	25
Bits* n°	48	56	54	72	54
Rotor rpm	238	238	176	176	176
Weight** kg	1310	1350	1800	2150	2200

*Net of additional bits for rotor balancing **Approximate

EQUIPMENT	STANDARD
3 points universal hitch (Category 2)	●
Single speed unit, 540 rpm	●
Reinforced rotor with high-strength, wear-resistant steel bits	●
Oil-bath idler-side support	●
Protective rings for the transmission support	●
Central PTO shaft with shear bolt	●
Single side gear transmission in oil bath by Valentini	●
Bearing support with special seals, Labyrinth Bearing Protection by Valentini	●
Protective hood in high-strength, wear-resistant steel	●
Mechanical adjustment skid kit	●
Mod. 400×100/400×150/500×150: Fixed side discharge chute	●
Mod. 500×300/600×200: Conveyor belt	●

TRACTOR EQUIPMENT REQUIRED

- Variable speed gearbox
- Hydraulic valves: 2–4
- Front ballast if necessary

» Accessories on p. 30

Images for illustrative purposes only. The product may vary due to design modifications.