



# KOALA

FORESTRY MULCHER FOR EXCAVATORS

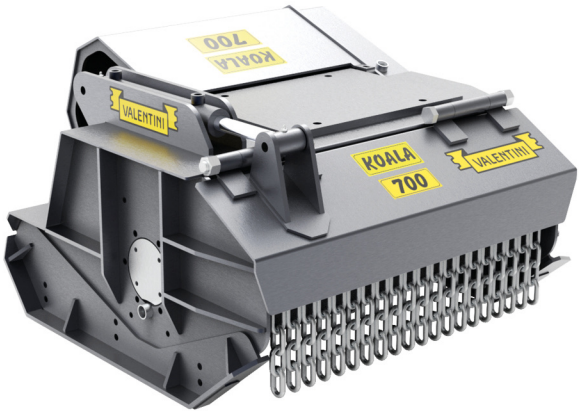


| MODEL | 700 | 900 |
|---|---|---|
| **Working width** mm | 700 | 900 |
| **Total width** mm | 880 | 1080 |
| **Teeth*** n° | 27 | 31 |
| **Flow rate** l/min | 30-45 | 45-60 |
| **Operating pressure** bar | 200-250 | 200-250 |
| **Excavator weight** t | 4-5 | 5-6 |
| **Weight**** kg | 335 | 415 |

*Net of additional bits for rotor balancing **Approximate

| EQUIPMENT | STANDARD |
|---|---|
| Unpainted steel plate for fabricating the excavator mounting bracket | ● |
| Housing with internal Hardox® wear-resistant steel plate | ● |
| Adjustable side skids with Hardox® wear-resistant plates | ● |
| Front and rear chains for protection against material ejection | ● |
| DCR rotor with tungsten-coated tools | ● |
| DCR Bite Limiter system with Hardox® 450 wear-resistant profiles | ● |
| Bearings with solid bronze cages, mounted inside the rotor | ● |
| Single transmission with 2 belts | ● |
| Piston hydraulic motor available in 12 cc or 20 cc displacement, with integrated anti-cavitation valve | ● |
| Nitrogen accumulator with shock-absorbing function for pressure spikes | ● |
| 2 m length hoses | ● |
| Hydraulically opening front door | ● |

Images for illustrative purposes only. The product may vary due to design modifications.