
110-170 HP

7-15 cm

15 cm

# FL - LEON

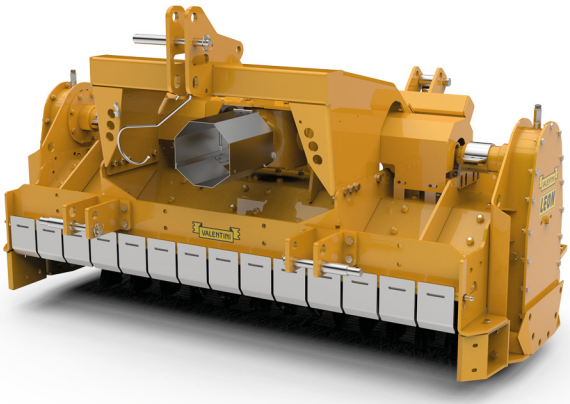

STONE CRUSHER

SKF Equipped

HARDOX IN MY BODY

| MODEL | 1800 | 2000 | 2300 |
|---|---|---|---|
| Power required HP | 110-170 | 120-170 | 130-170 |
| Power required kW | 81-125 | 88-125 | 95-125 |
| Working width mm | 1825 | 2075 | 2325 |
| Total width mm | 2075 | 2325 | 2575 |
| Bits* n° | 127 | 143 | 162 |
| Rotor rpm | 328 | 328 | 328 |
| Weight** kg | 1650 | 1800 | 1950 |

*Net of additional bits for rotor balancing **Approximate

| EQUIPMENT | STANDARD |
|---|---|
| 3 points universal hitch (Category 2) | ● |
| Single speed unit, 1000 rpm | ● |
| Size 503 reinforced rotor with Ø 25 high-strength, wear-resistant steel bits | ● |
| Protective rings for the transmission support | ● |
| Central PTO shaft with shear bolt (tractor side fork 1” 3/8 Z6) | ● |
| Double side gear transmission in oil bath | ● |
| Bearing support with special seals, Labyrinth Bearing Protection by Valentini | ● |
| Rear containment plates and screening grids for crushed material, adjustable with mechanical jacks | ● |
| Protective shroud casing and sledge on outer side | ● |
| Counter protective guard in high-strength, wear-resistant steel | ● |
| Friction timing system by Valentini | ● |

**TRACTOR EQUIPMENT REQUIRED**
- Variable speed gearbox
- Hydraulic valves: 2–4
- Front ballast if necessary

» Accessories on p. 30

Images for illustrative purposes only. The product may vary due to design modifications.